

TWP® 300 Series is Easy to Apply

FOR STAINED EFFECT

New wood should be allowed 4-12 months of natural weathering before finish coat application. Weathered wood should be cleaned and dried before finishing. If wood was previously sealed, the old finish should be removed and the surface should be cleaned and dried before finishing. Apply as much material as the wood can absorb without leaving a glossy surface film. Typically one coat is sufficient, but more absorbent wood may require multiple wet on wet coats. Remove any material that remains on the surface 20-30 minutes after application of the final coat to insure a uniform low gloss stained appearance. Typically applied at 500-600 square feet per gallon per coat, but rate depends on wood porosity.

FOR DEEP GLOSS FINISH

New, old and previously sealed wood should be sanded before finish coat application. Stripping or powerwashing may be necessary to remove old finish prior to sanding. All sanding dust should be removed before applying finish. Apply the first coat of material at 500-600 square feet per gallon. Differences in absorption will likely yield areas of low and high gloss. Allow finish to dry 24 hours or until firm. Apply a second coat at 800-1000 square feet per gallon. Two coats are typically needed to achieve a uniform glossy appearance, but a third coat may be needed on extremely porous wood. If a third coat is needed apply 24 hours after the second or when the second coat is firm.

Refer to label or technical data sheet for complete surface preparation and application instructions.

MIX THOROUGHLY BEFORE USING AND
OCCASIONALLY DURING USE



BEAUTIFIES
AND
PROTECTS

TWP® 300 SERIES

WATER REPELLENT

Resists warping, cracking and splitting.
Inhibits freeze damage in colder climates.

U.V. RESISTANT*

U.V. absorbing pigments prevent the premature graying, darkening and fading of wood.

MILDEW RESISTANT FILM

Inhibits the growth of mold and mildew on the film surface preventing premature discoloration, keeping surfaces looking new longer.

EASY APPLICATION

Long lasting formula is easy to apply and maintain.

*TWP-300 Clear will allow the wood to gray naturally.

Your Local TWP Dealer



AMTECO



Made in the USA

TWP® is a registered trademark of AMTECO Inc
PO Box 9 • 1100 Jefferson St.
Pacific, Missouri 63089
www.usatwp.com
© 2014


TWP®

TOTAL WOOD PROTECTANT



WHY JUST STAIN... WHEN YOU CAN PROTECT!

LOW VOC
FORMULATION

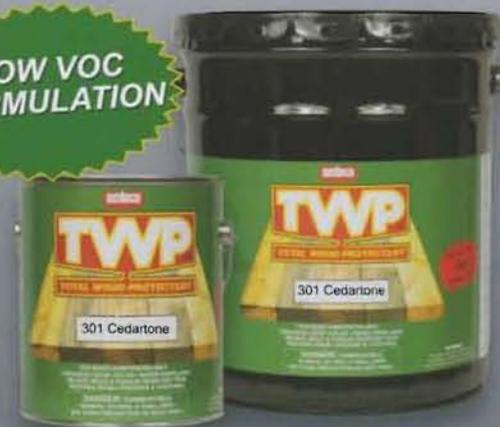

AMTECO

TWP® is a registered trademark of AMTECO Inc

SUPERIOR PROTECTION FOR EXTERIOR WOOD SURFACES

TWP® 300 Series Exterior Wood Finish

TWP® 300 Series is a high solids, high performance, oil based, exterior wood finish. Its unique formulation enhances the natural beauty and warmth of wood. Special UV absorbing pigments prevent the premature graying, darkening and fading of wood, while carefully selected mildewcides inhibit the growth of mold and mildew on the surface of the finish.

TWP® 300 Series may be applied to obtain a natural stained or deep gloss finish depending on application procedure.



Total Wood Protectant AVAILABLE IN SIX RICH COLORS

301 Cedartone

302 Redwood

303 Dark Oak

304 Black Walnut

311 California Redwood

315 Light Cedar

Apply product to an inconspicuous section of surface to be coated to determine acceptability of color.



TWP® 300 Series Total Wood Protectant

- ✓ High performance formulation
- ✓ Oil based
- ✓ Easy application
- ✓ Deep gloss or natural stained finish
- ✓ Prevents premature UV damage
- ✓ Mold and mildew resistant film
- ✓ Repels water

Ideal for these Exterior Wood Applications

- ✓ Furniture
- ✓ Playground equipment
- ✓ Picnic tables
- ✓ Shutters
- ✓ Trim
- ✓ Entryway and garage doors
- ✓ Railings



For more information call 1-800-969-4811 or visit www.usetwp.com

TWP® is a registered trademark of AMTECO, Inc.